


机构性能 Mechanisms

机构特性 Mechanisms specification				S		S			S	kW	
起升 Hoisting	↑	33PC15	m/min	6	40	80	3	20	40	486m > 486m※	24/24/4,5
			t	3	3	1,5	6	6	3		
		33LVF15	m/min	0 - 40	40 - 80	0 - 20	20 - 40			360m > 360m※	24
			t	3	1,5	6	3				
变幅 Trolleying	←→	95JXL	m/min	0 - 58						95Nm	
回转 Slewing	↻	RCV95	r/min	0 - 0,8						2 × 95Nm	
行走 Travelling	↔	RT324	m/min	12,7 / 25,4						2 × 2,6/5,2	
电源 Power Supply				380V (±5%) 50Hz							
KVA 供电容量 Necessary Electric Power				33PC15: 50KVA							


※ 请联系我们 Please consult us  
△ 可选 Option

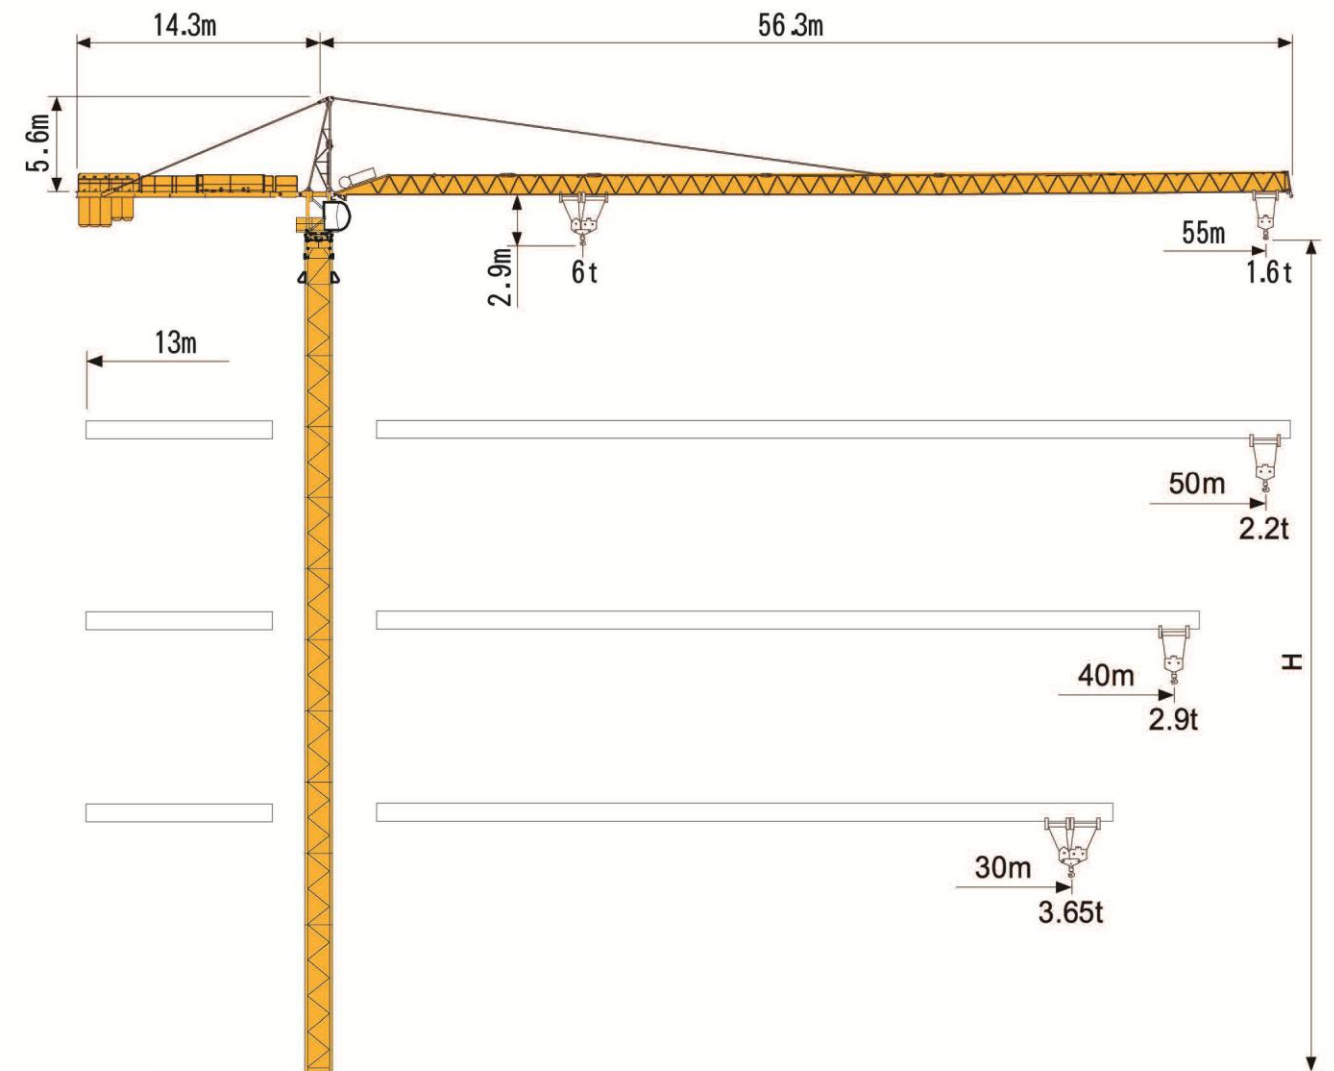


沈阳宝泉商贸有限公司  
地址: 辽宁省沈阳市大东区东北大马路264号, 509-511室  
电话: 0086-24-26210512  
传真: 0086-415-3165597  
邮箱: bqswgs@163.com  
网址: <http://www.bq-sy.com>

SHENYANG BAOQUAN BUSINESS CO., LTD  
ADD: ROOM NO.509-511, NO.264 DONGBEI DAMALU ROAD, DADONG DISTRICT, SHENYANG CHINA  
Tel: 0086-24-26210512  
Fax: 0086-415-3165597  
E-mail: bqswgs@163.com  
Url: <http://www.bq-sy.com>


塔身截面 Mast

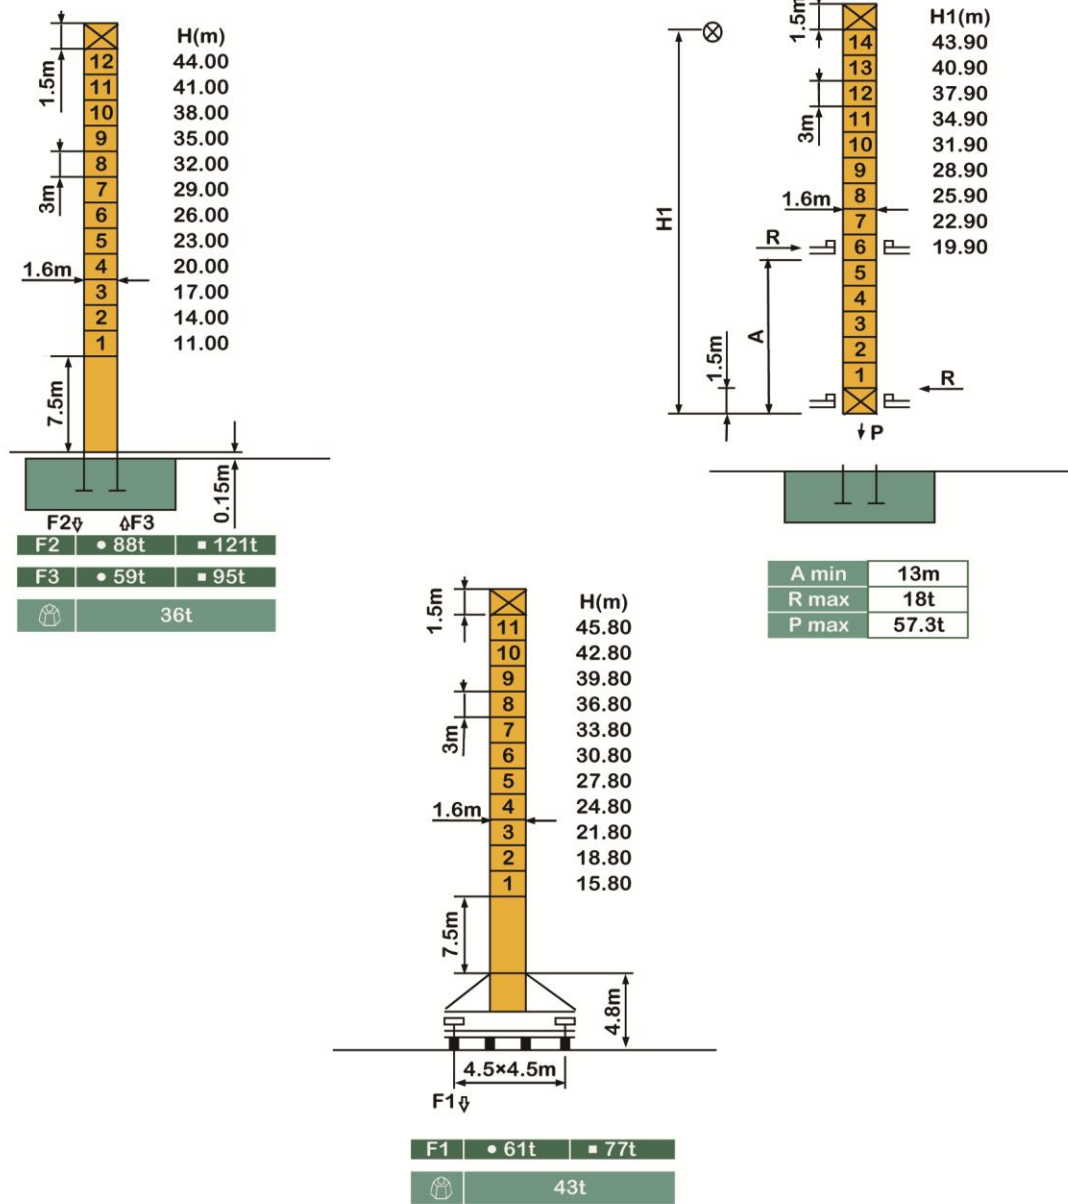

附着 Anchorages

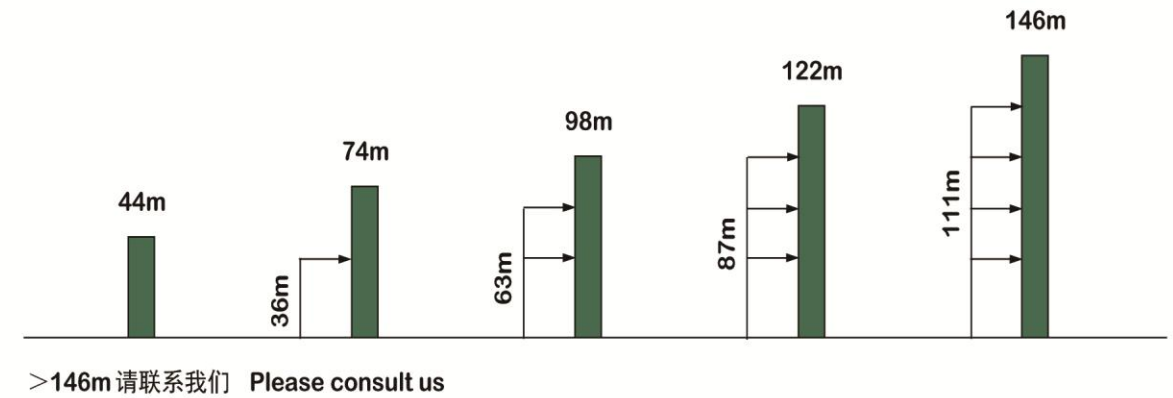

载荷特性 Load Diagrams

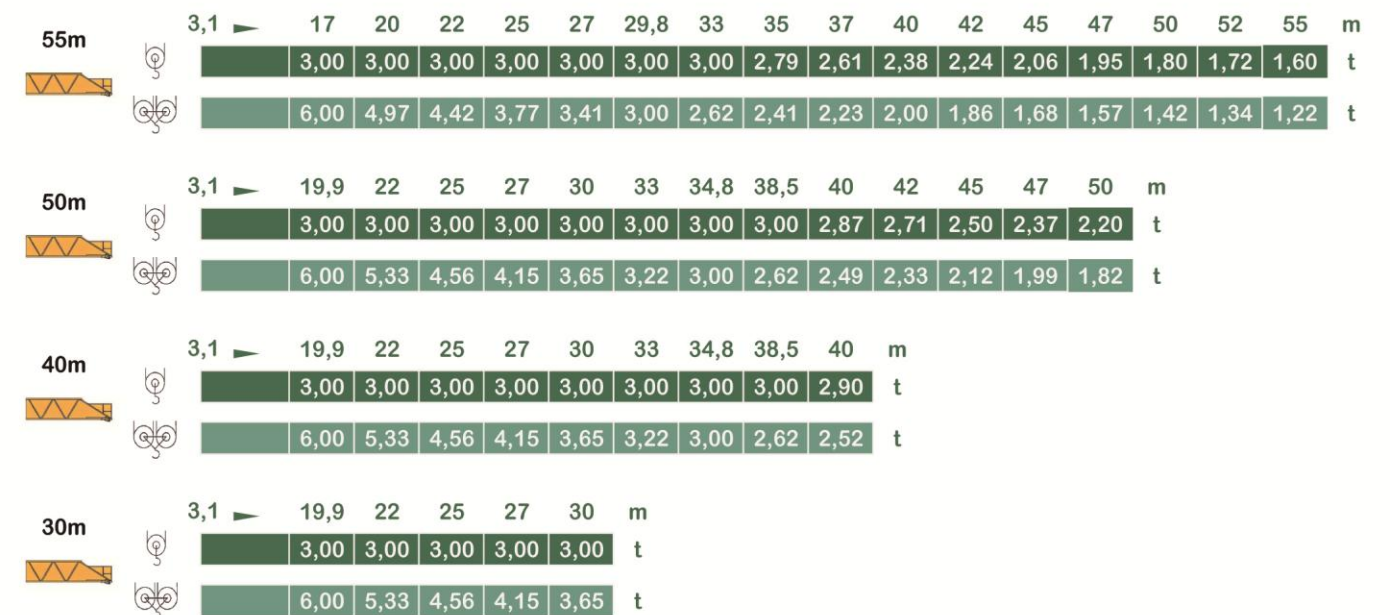

F 反力 Reactions

- 工作状态 In service
- 非工作状态 Out of service

自重 Self-load

不带载荷及配重, 最大臂长及标准高度时的自重。

Without load and counter-weight with longest jib and standard height