



附着 Anchorages

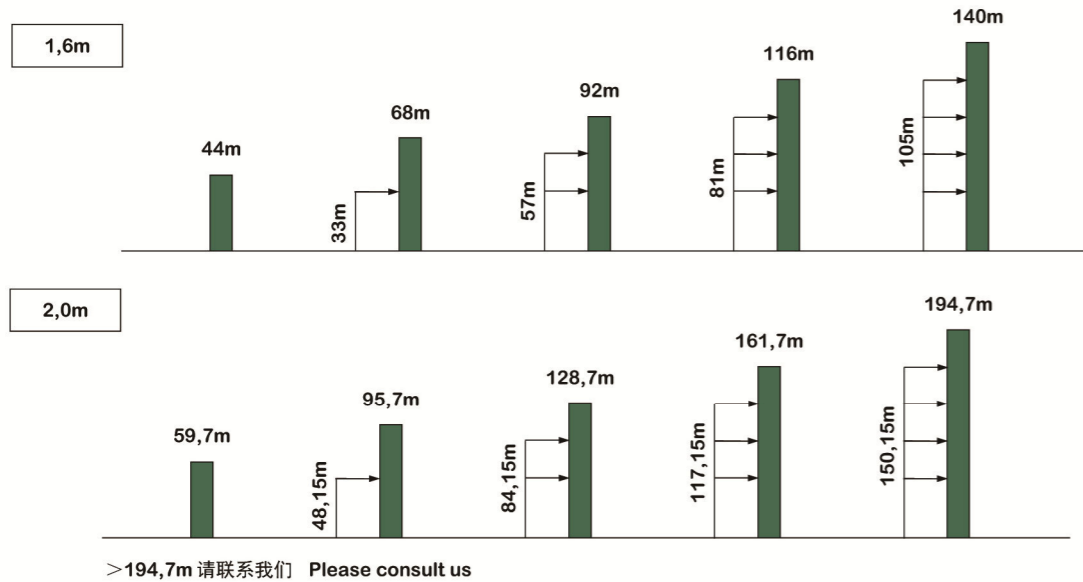


机构性能 Mechanisms

机构特性 Mechanisms specification		Ⓢ		Ⓣ		Ⓜ		kW	
起升 Hoisting	55RCS25	m/min	0-42	0-85	0-21	0-42	500m	40,5	
		t	5,0	2,5	10,0	5,0	> 500m※		
变幅 Trolleying	95JXL	m/min	0-45	45-90	0-22	22-45	550m	45	
		t	5,0	2,5	10,0	5,0	> 550m※		
回转 Slewing	RCV95 (JH08)	r/min	0 - 0,64				95Nm		2 × 95Nm
行走 Travelling	RT443(L68B2)	m/min	12,1 / 24,1				4 × 3,4/1,7		2 × 2,6/5,2
	RT324(L46A1)	m/min	12,7 / 25,4						
电源 Power Supply		380V (±5%) 50Hz							
供电容量 Necessary Electric Power		55RCS25: 80kVA							

※ 请联系我们 Please consult us
△ 可选 Option

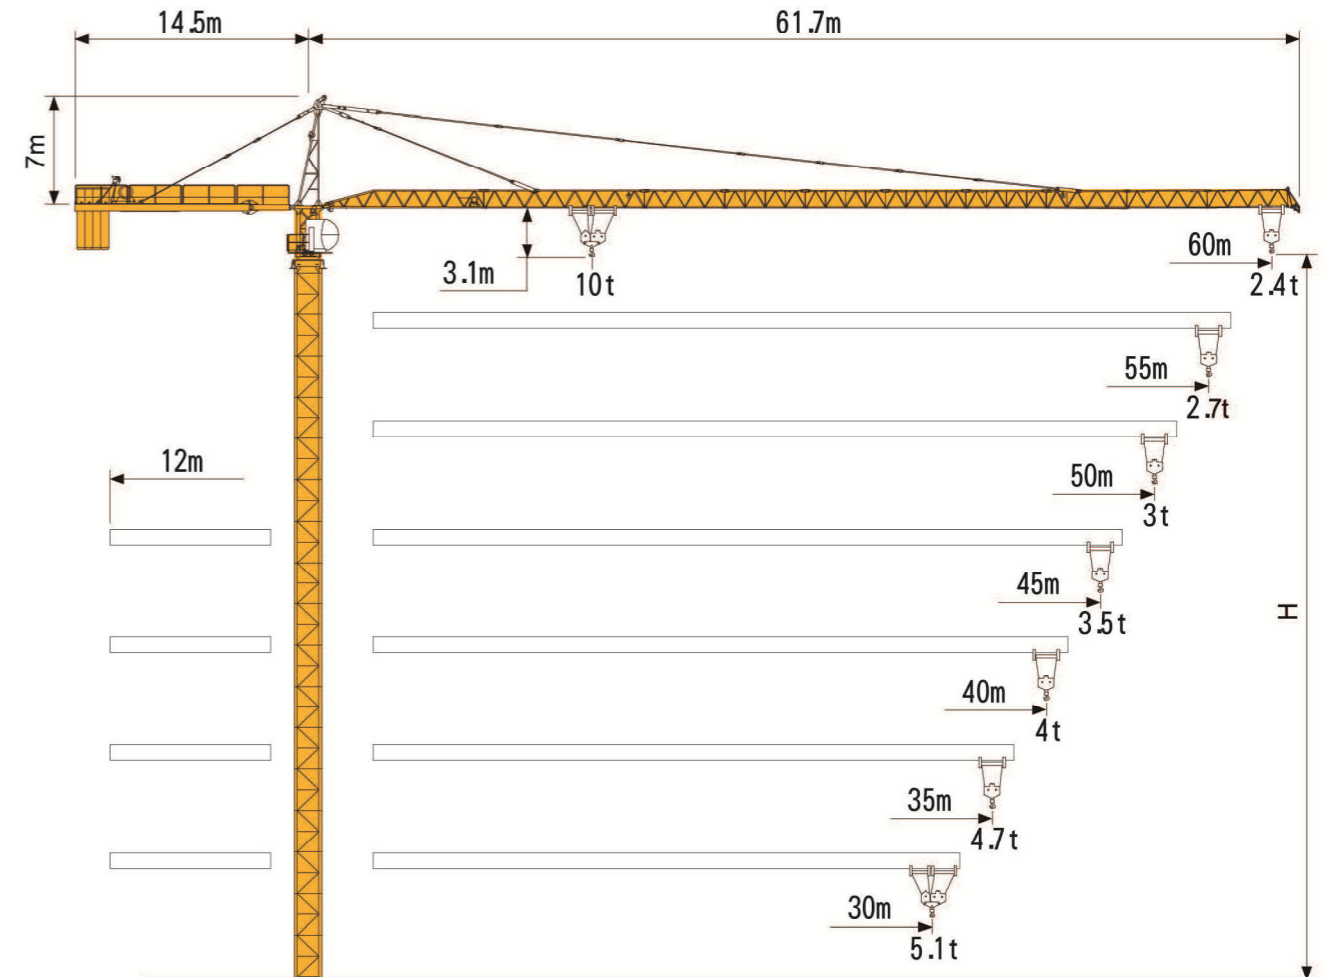

塔身截面 Mast

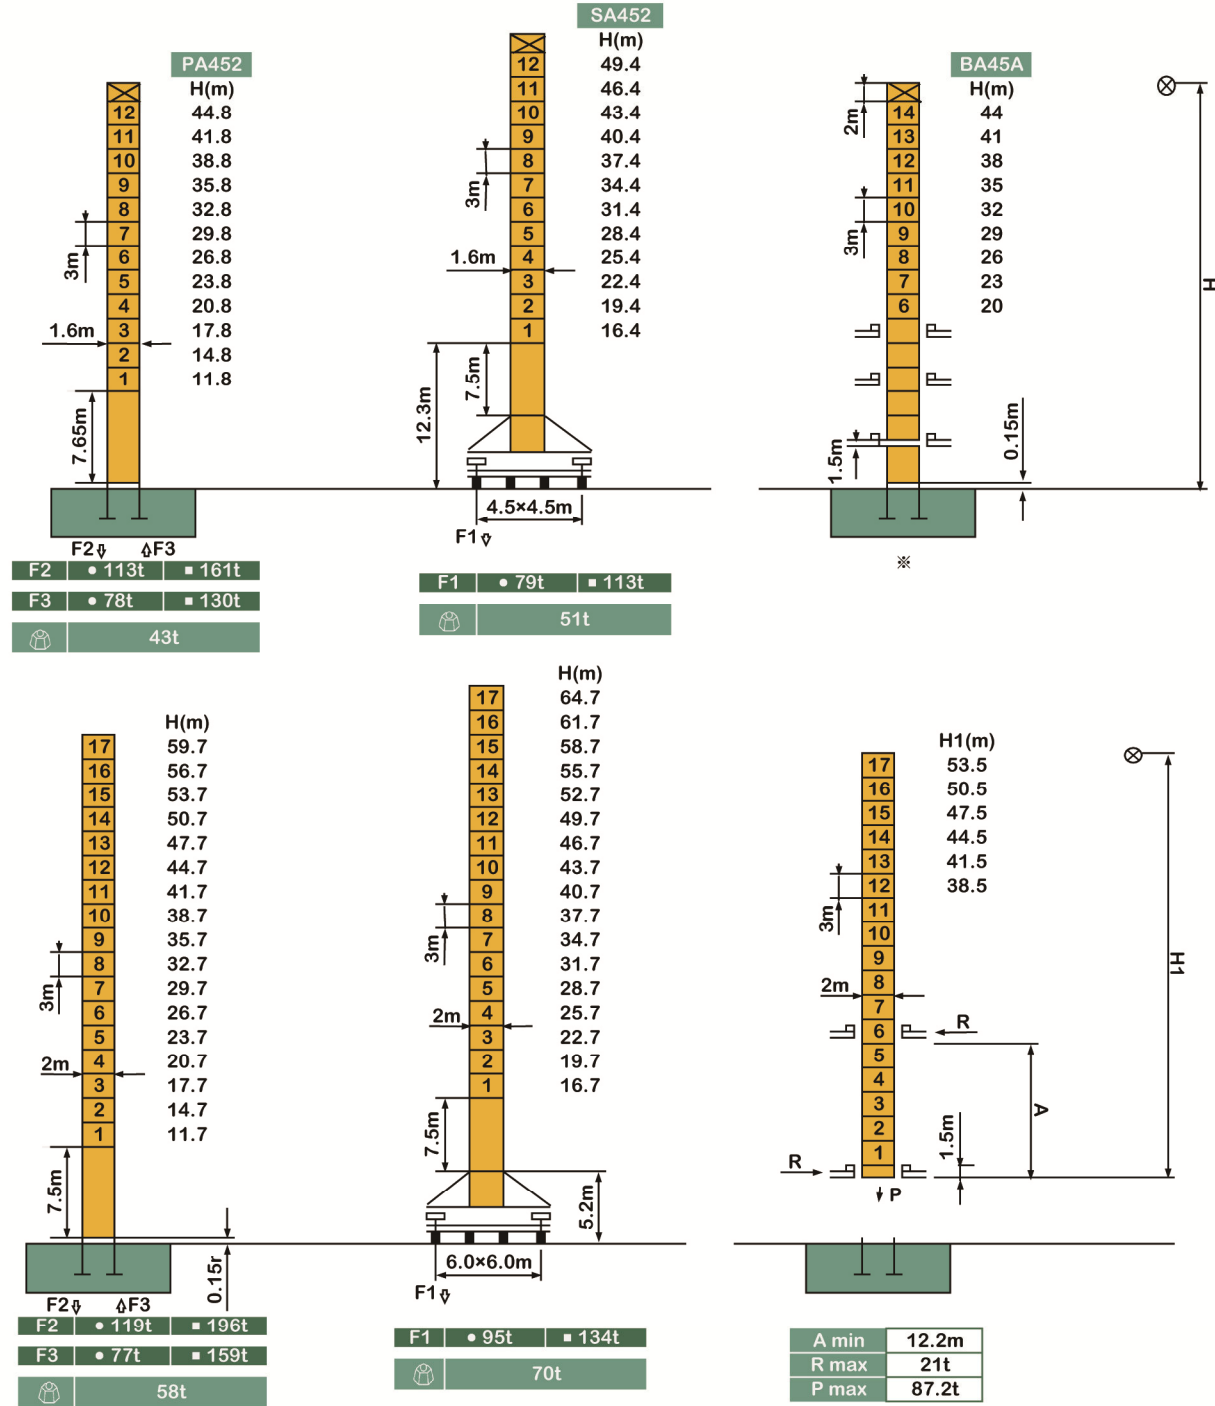

载荷特性 Load Diagrams



F 反力 Reactions	<ul style="list-style-type: none"> 工作状态 In service 非工作状态 Out of service 	<ul style="list-style-type: none"> 自重 Self-load 	不带载荷及配重, 最大臂长及标准高度时的自重。 Without load and counter-weight with longest jib and standard height
----------------	---	--	---