








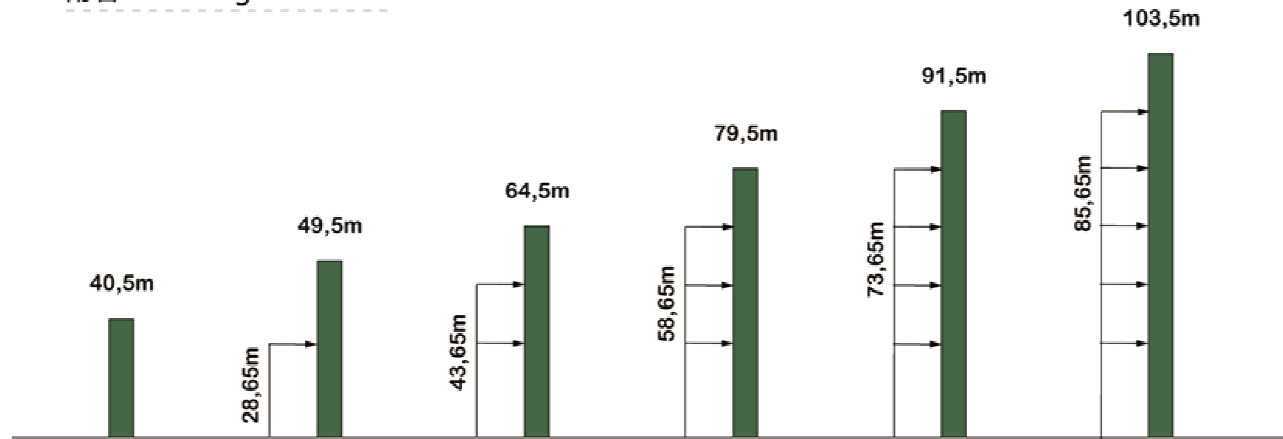


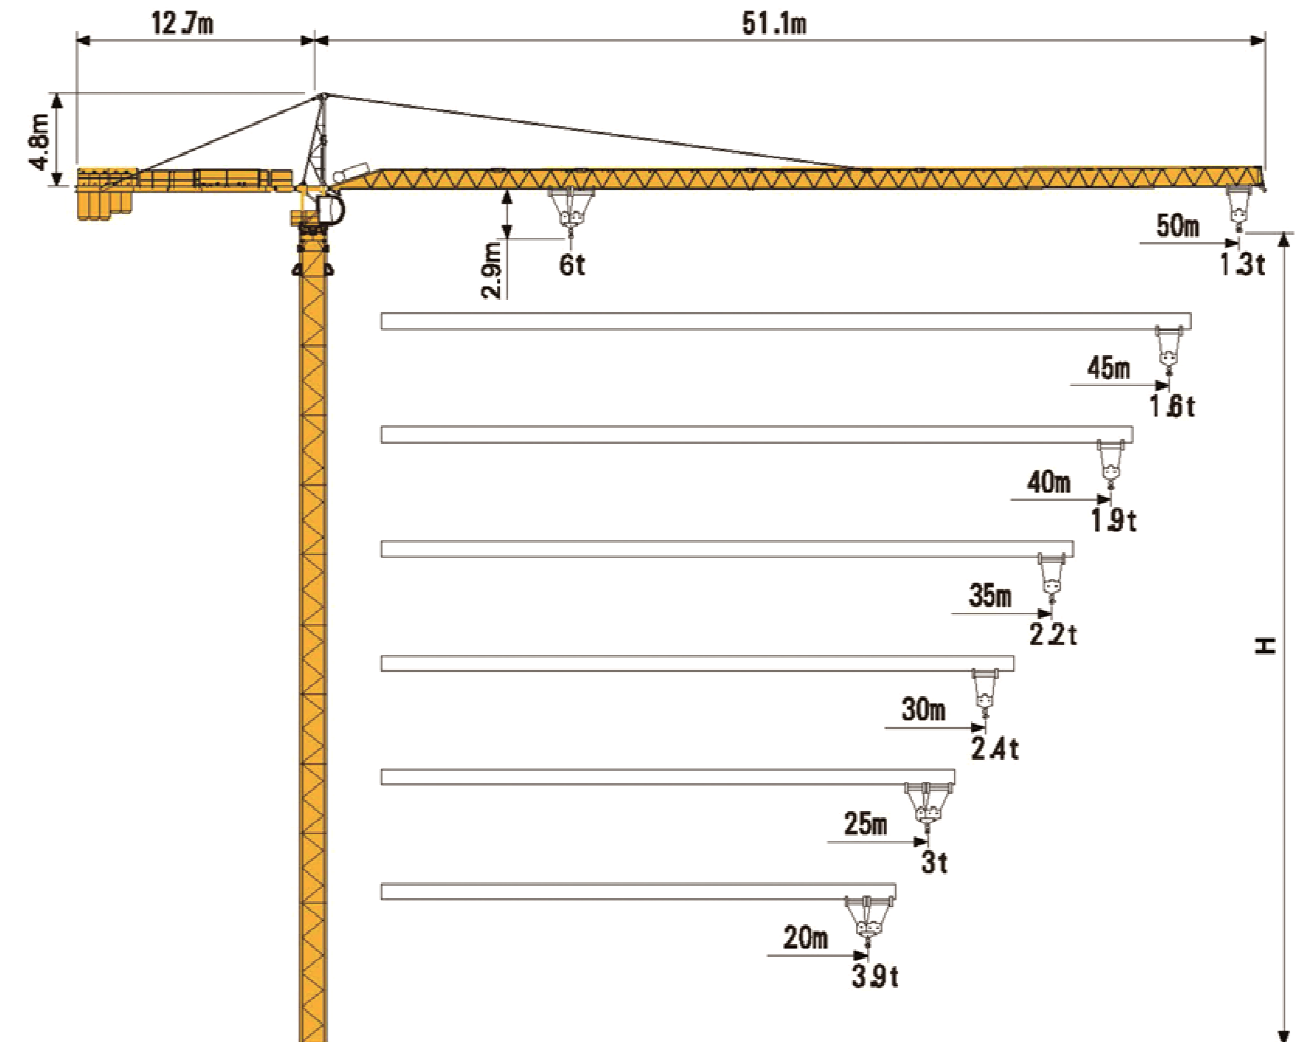
附着 Anchorages




> 103,5m 请联系我们 Please Consult Us

机构性能 Mechanisms


机构特性 Mechanisms specification											kW
起升 Hoisting		33PC15	m/min	10	40	80	5	20	40	400m	24
			t	3	3	1,5	6	6	3		
变幅 Trolleying		4D3V2	m/min	15 - 30 - 58							3
回转 Slewing		RCV95 (JH07)	r/min	0 - 0,64							4,4 x 2
行走 Travelling		RT324C1	m/min	12,5 - 25							5,2 x 2
 电源 Power Supply						400V (±10 %) 50Hz					
 供电容量 Necessary Electric Power						33PC 50kVA					



塔身 Tower

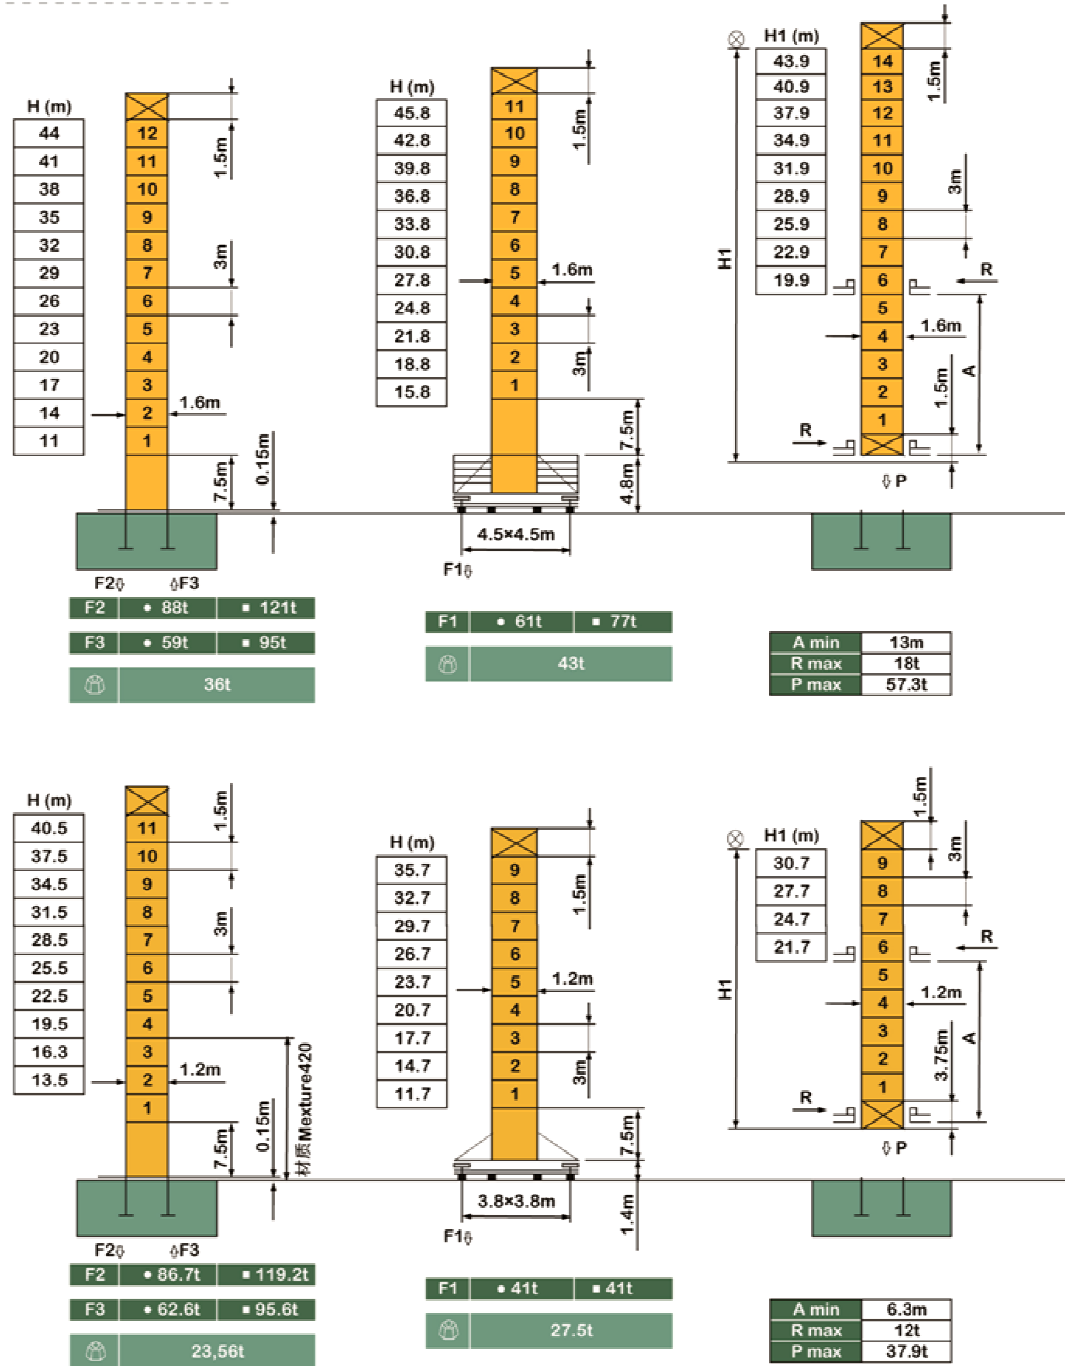

载荷特性 Load Diagrams

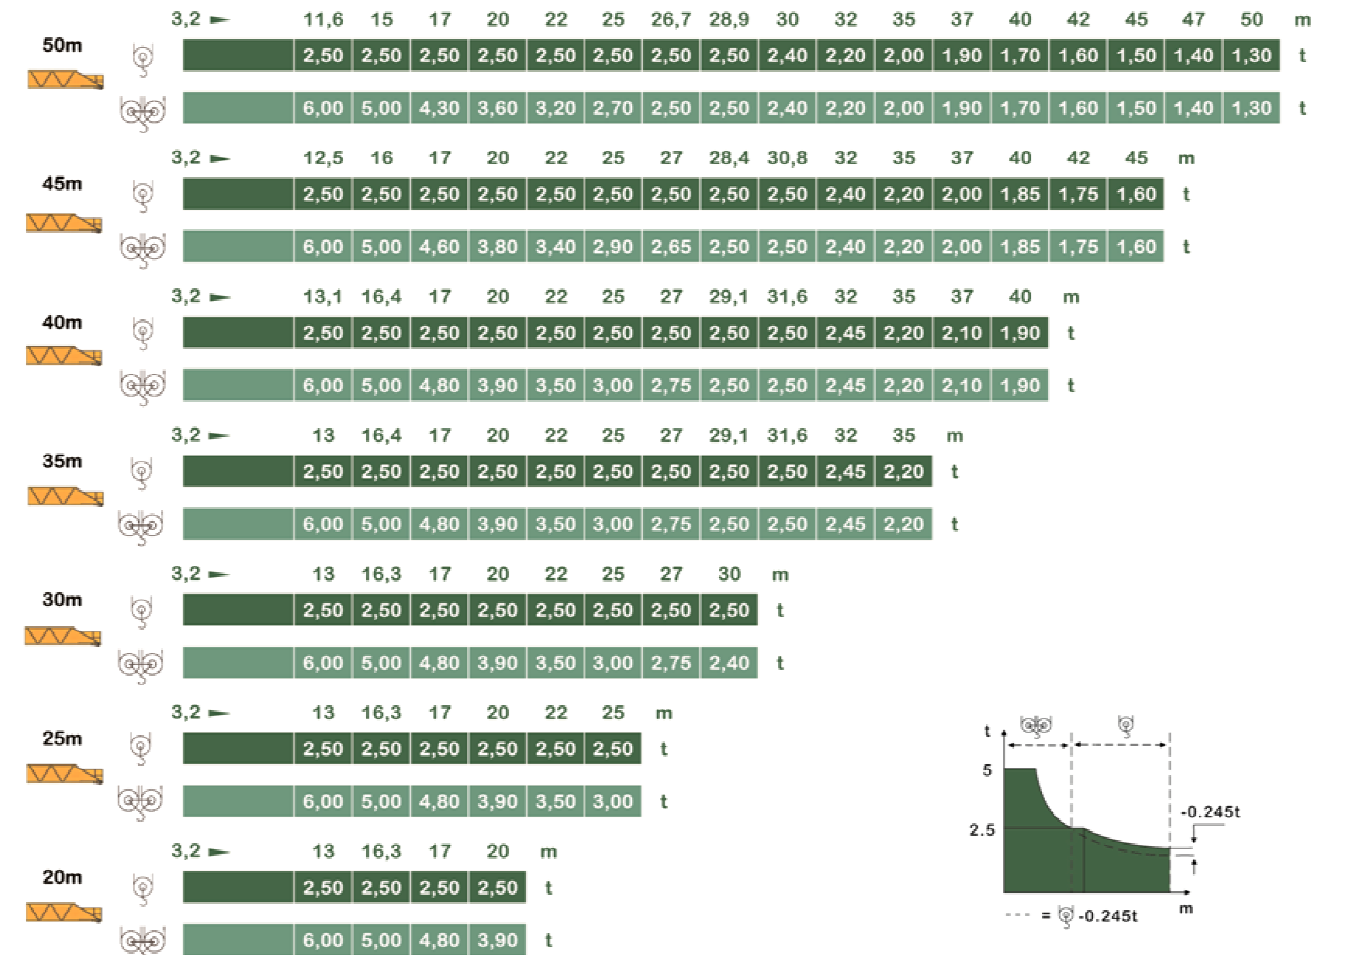

内爬塔机 Climbing Crane

