



机构性能 Mechanisms


| 机构特性<br>Mechanisms specification  |    |         |       |                  |    |     |   |    |    |         | kW |
|-----------------------------------|----|---------|-------|------------------|----|-----|---|----|----|---------|----|
| 起升<br>Hoisting                    | ↑  | 33PC15  | m/min | 10               | 40 | 80  | 5 | 20 | 40 | 400m    | 24 |
|                                   |    |         | t     | 3                | 3  | 1,5 | 6 | 6  | 3  |         |    |
| 变幅<br>Trolleying                  | ←→ | 4D3V3   | m/min | 15 - 30 - 58     |    |     |   |    |    | 3       |    |
| 回转<br>Slewing                     | ↻  | RCV145  | r/min | 0 - 0,8          |    |     |   |    |    | 2 × 4,4 |    |
| 行走<br>Travelling                  | ↔  | RT324C1 | m/min | 12,5 - 25        |    |     |   |    |    | 2 × 5,2 |    |
| 电源 Power Supply                   |    |         |       | 400V (±10%) 50Hz |    |     |   |    |    |         |    |
| KVA 供电容量 Necessary Electric Power |    |         |       | 33PC 50kVA       |    |     |   |    |    |         |    |

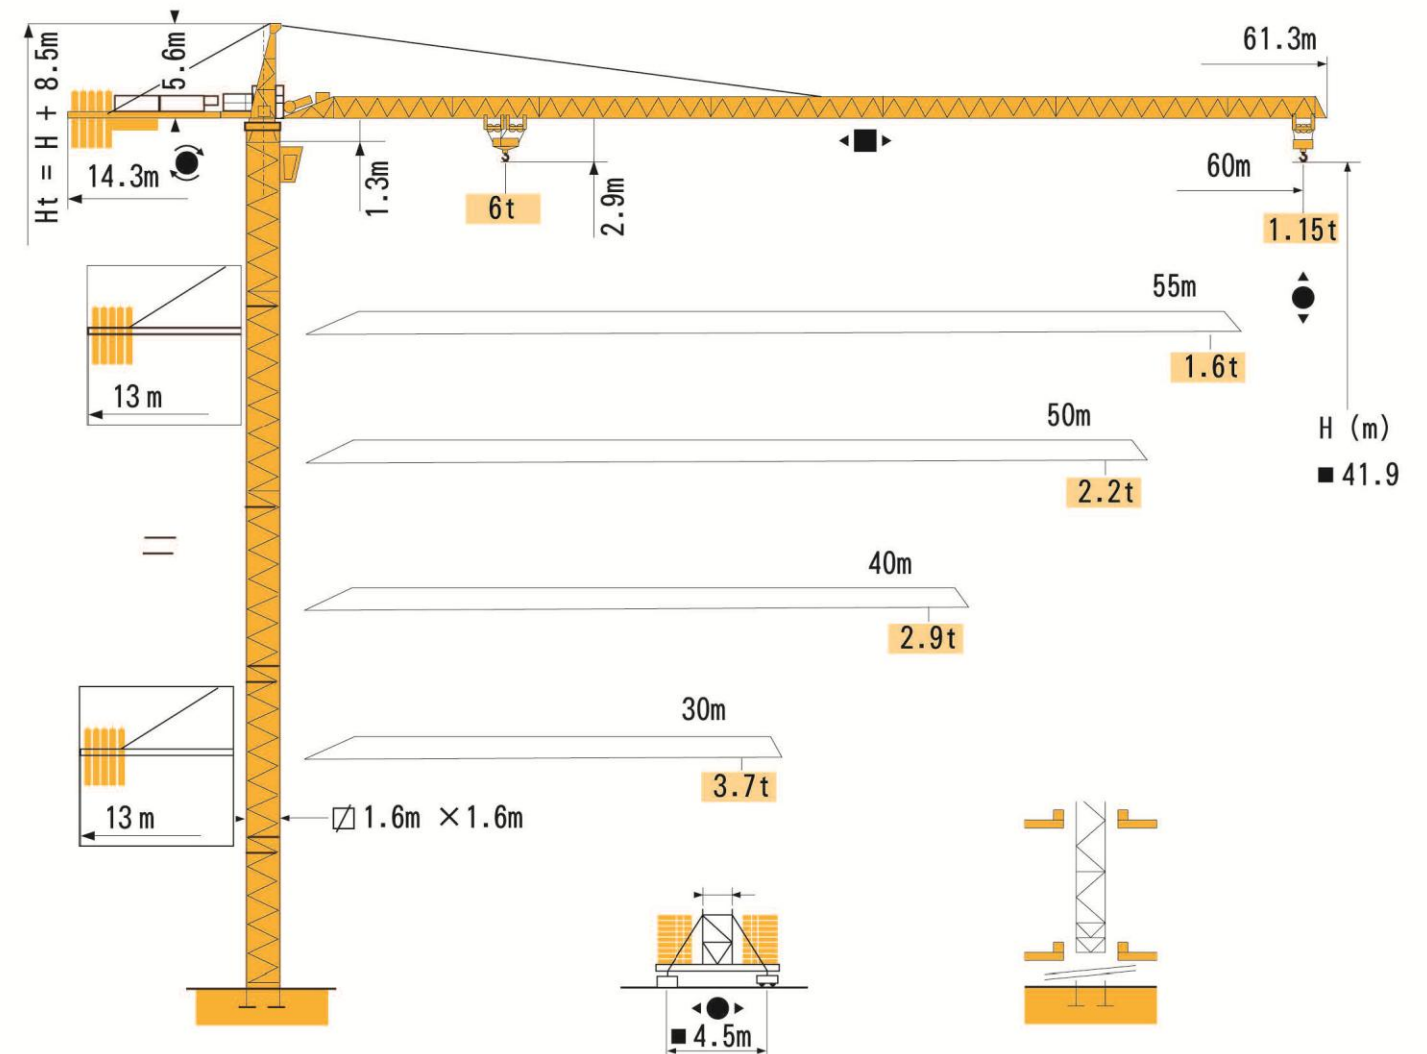



塔身截面 Mast

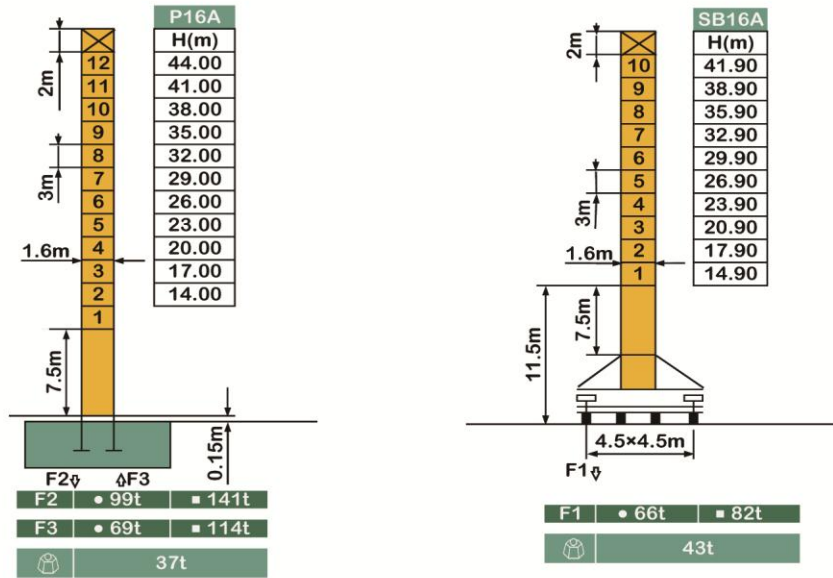

内爬 Climbing Crane

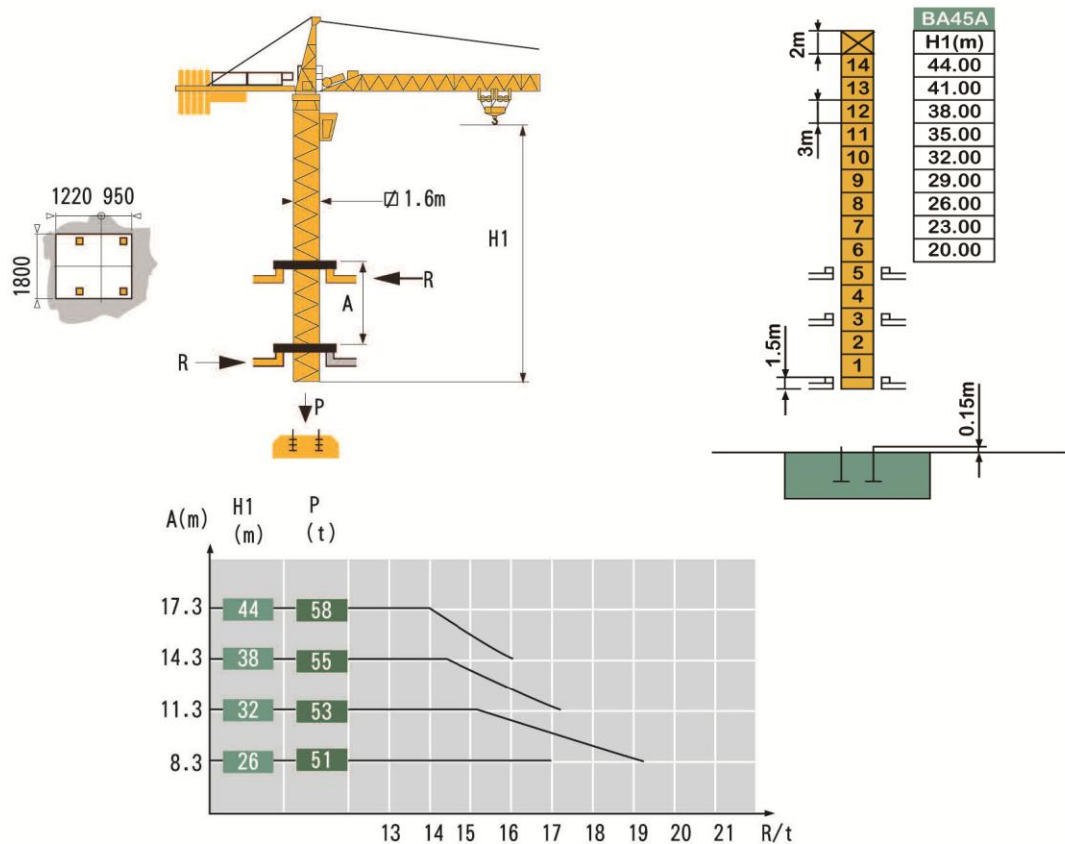

载荷特性 Load Diagrams

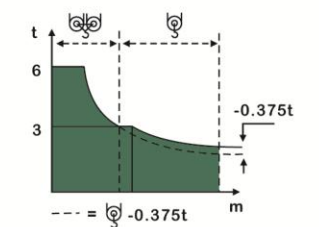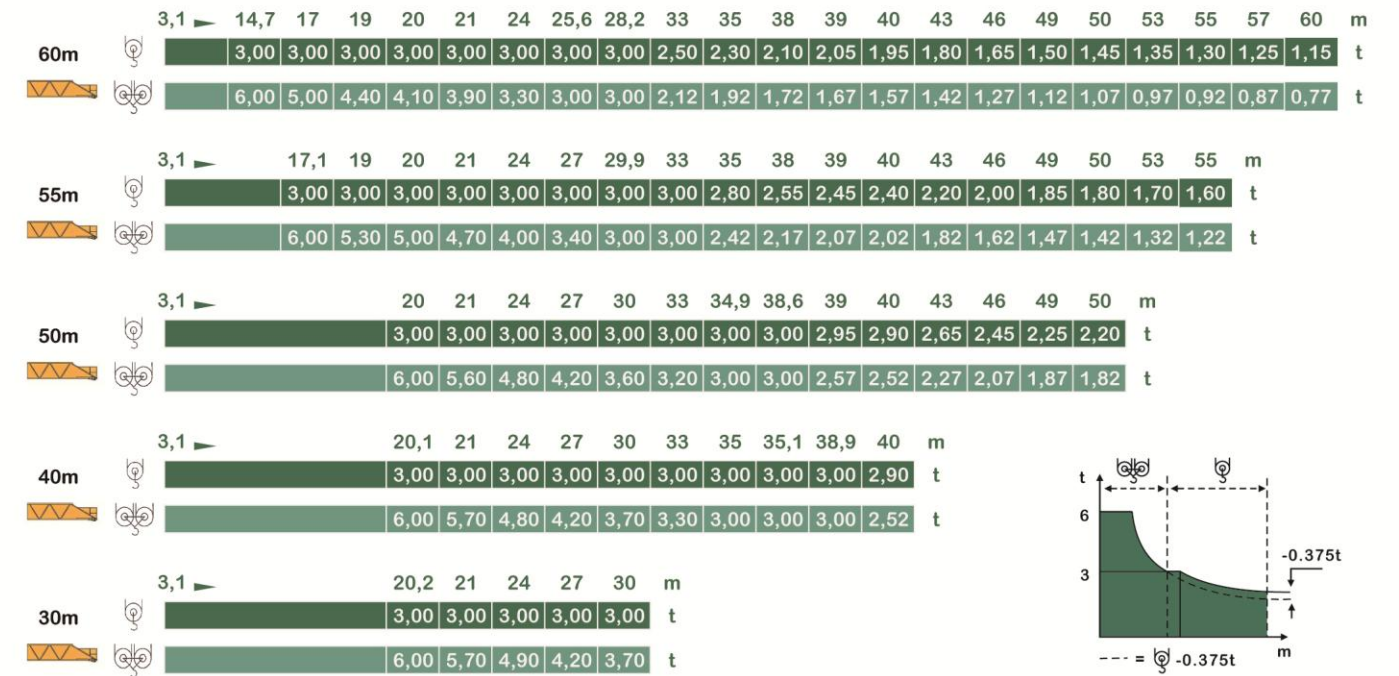

平衡臂配重 Counter-jib Ballast

| Height (m) | Counter-jib Length (m) | 3700kg | 2250kg | Total Weight (kg) |
|------------|------------------------|--------|--------|-------------------|
| 60m        | 14.3m                  | 4      | 1      | 17050             |
| 55m        | 13m                    | 5      | 0      | 18500             |
| 50m        | 13m                    | 4      | 1      | 17050             |
| 40m        | 13m                    | 2      | 3      | 14150             |
| 30m        | 13m                    | 2      | 2      | 11900             |

压重 Base Ballast

| Height (m) | Weight (t) |
|------------|------------|
| 41.9       | 78         |
| 38.9       | 66         |
| 35.9       | 66         |
| 32.9       | 54         |
| 29.9       | 54         |
| 26.9       | 48         |
| 23.9       | 48         |
| 20.9       | 48         |
| 17.9       | 48         |
| 14.9       | 48         |