



附着 Anchorages

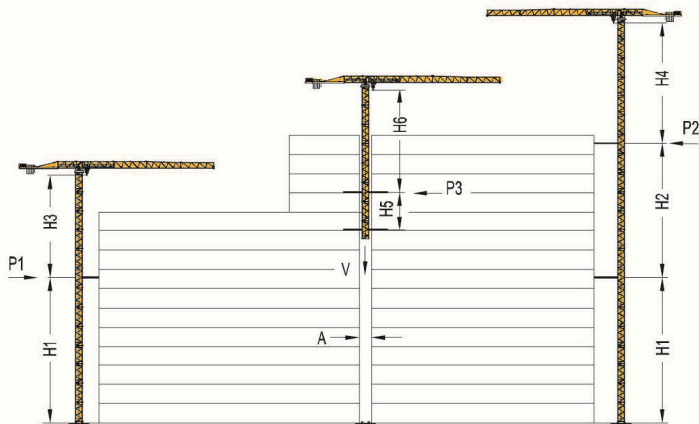


塔身 Mast	T23.18		
	m	工作状态 Working	非工作状态 Off Working
		t	t
H1	54,2	—	—
H2	48,0	—	—
H3	58,8	—	—
H4	52,8	—	—
H5	12,0	—	—
H6	34,8	—	—
P1	—	23,0	26,0
P2	—	20,5	22,0
P3	—	22,0	25,0
V	—	100,0	90,0
A	2,6		




机构性能 Mechanisms

机构特性 Mechanisms specification										kW
起升 Hoisting		100LVF40B	m/min	0-32	0-64	0-96	0-16	0-32	0-48	
			t	8	4	2	16	8	4	75
变幅 Trolleying		PX185K	m/min	0-65						185Nm
回转 Slewing		RCV145	r/min	0-0,68						145Nm x 3
行走 Travelling		5,5TRVF	m/min	22/11						5,5 x 4
电源 Power Supply				380V 50Hz / 440V 60Hz						
供电容量 Necessary Electric Power				75LVF:109kVA						
其它形式起升功率 Other Lifting motor				90LVF:127kVA 70RCS:83kVA						

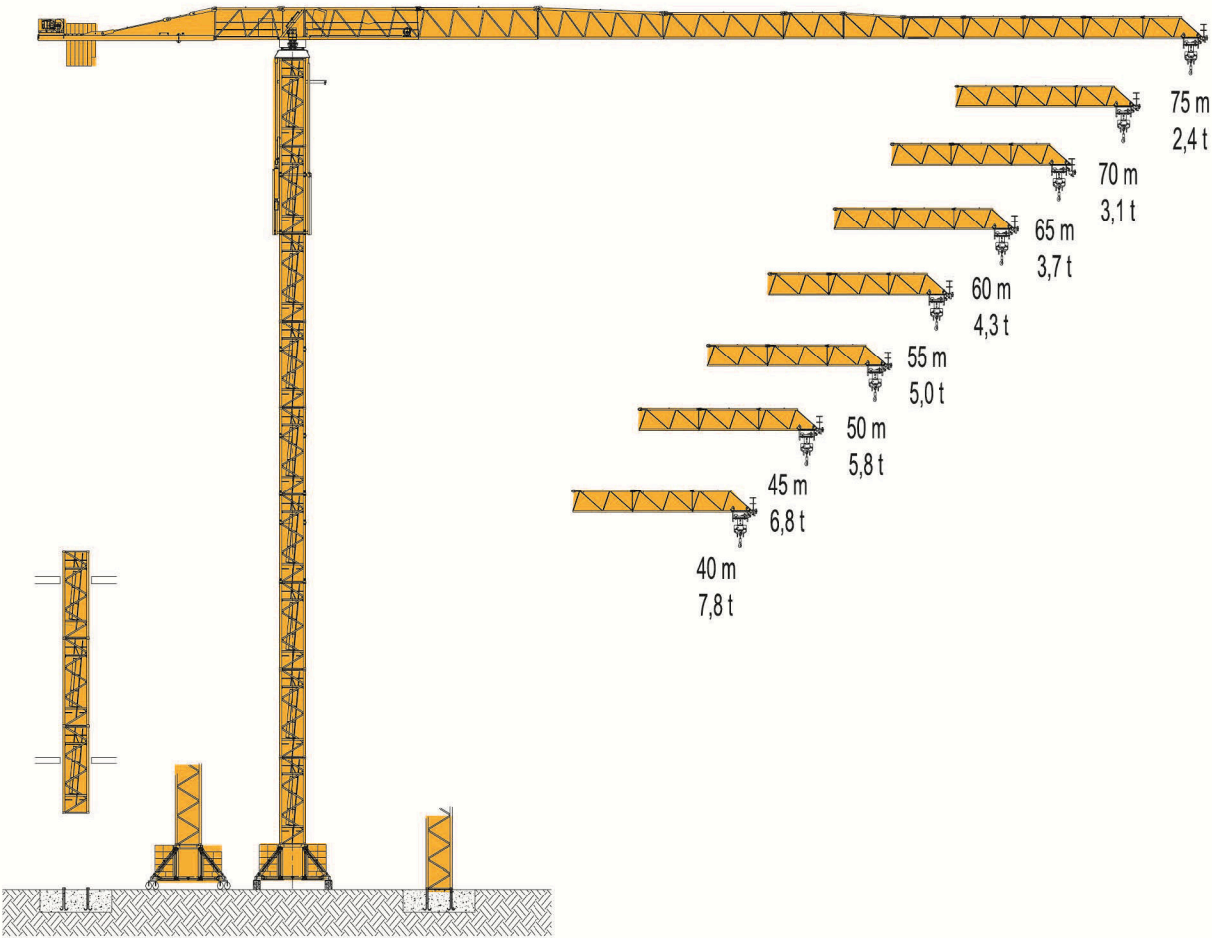


起重臂 Jib

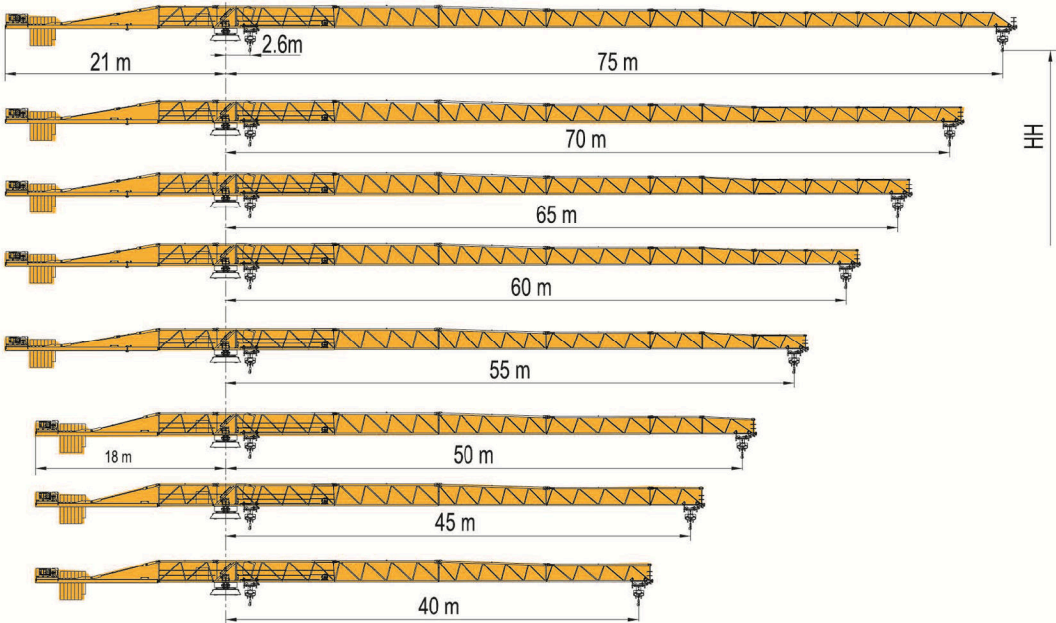

载荷特性 Load Diagrams

75m		2,5	14,9	20	25	27,9	30	35	40	45	50	55	60	65	70	75	m
			8,00	8,00	8,00	8,00	7,36	6,16	5,27	4,58	4,03	3,58	3,21	2,90	2,63	2,40	t
			16,00	11,44	8,82	7,68	7,10	5,89	4,99	4,30	3,75	3,29	2,92	2,60	2,33	2,10	t
70m		2,5	16,5	20	25	30	31,3	35	40	45	50	55	60	65	70		m
			8,00	8,00	8,00	8,00	8,00	7,06	6,06	5,28	4,67	4,17	3,75	3,40	3,10		t
			16,00	12,87	9,97	8,08	7,68	6,74	5,74	4,97	4,36	3,86	3,45	3,10	2,80		t
65m		2,5	17,7	20	25	30	33,3	35	40	45	50	55	60	65			m
			8,00	8,00	8,00	8,00	8,00	7,58	6,52	5,70	5,05	4,51	4,07	3,70			t
			16,00	13,98	10,88	8,84	7,78	7,40	6,34	5,51	4,85	4,32	3,88	3,50			t
60m		2,5	18,5	20	25	30	34,9	35	40	45	50	55	60				m
			8,00	8,00	8,00	8,00	8,00	7,97	6,86	6,00	5,32	4,76	4,30				t
			16,00	14,68	11,43	9,30	7,81	7,79	6,68	5,81	5,13	4,57	4,10				t
55m		2,5	19,3	20	25	30	35	36,4	40	45	50	55					m
			8,00	8,00	8,00	8,00	8,00	8,00	7,19	6,29	5,58	5,00					t
			16,00	15,35	11,96	9,74	8,17	7,76	7,00	6,10	5,38	4,80					t
50m		2,5	19,9	20	25	30	35	37,6	40	45	50						m
			8,00	8,00	8,00	8,00	8,00	8,00	7,47	6,54	5,80						t
			16,00	15,90	12,40	10,10	8,48	7,77	7,27	6,34	5,60						t
45m		2,5		20,6	25	30	35	38,9	40	45							m
				8,00	8,00	8,00	8,00	8,00	7,76	6,80							t
				16,00	12,87	10,49	8,81	7,78	7,56	6,60							t
40m		2,5		20,6	25	30	35	39,1	40								m
				8,00	8,00	8,00	8,00	8,00	7,80								t
				16,00	12,93	10,54	8,85	7,79	7,60								t

塔身 Tower

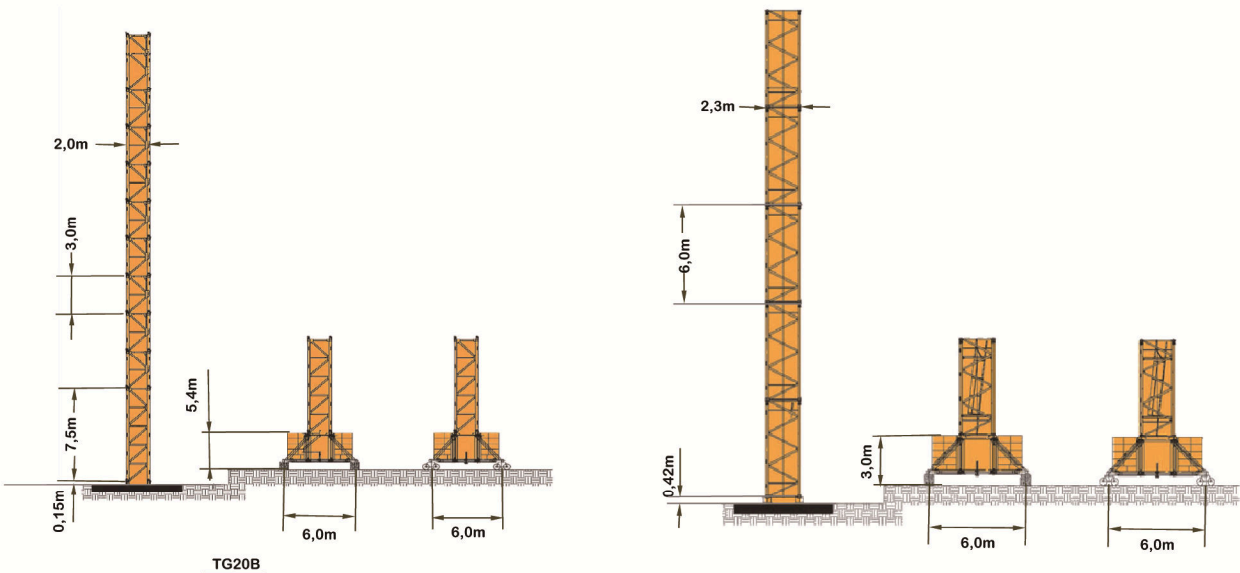

固定式 Stationary type												
塔身 TG20B		臂架长度 Leight of jib										
No.	HH (m)	30	35	40	45	50	55	60	65	70	75	
1	9,6	●	●	●	●	●	●	●	●	●	●	
2	12,6	●	●	●	●	●	●	●	●	●	●	
3	15,6	●	●	●	●	●	●	●	●	●	●	
4	18,6	●	●	●	●	●	●	●	●	●	●	
5	21,6	●	●	●	●	●	●	●	●	●	●	
6	24,6	●	●	●	●	●	●	●	●	●	●	
7	27,6	●	●	●	●	●	●	●	●	●	●	
8	30,6	●	●	●	●	●	●	●	●	●	●	
9	33,6	●	●	●	●	●	●	●	●	●	●	
10	36,6	●	●	●	●	●	●	●	●	●	●	
11	39,6	●	●	●	●	●	●	●	●	●	●	
12	42,6	●	●	●	●	●	●	●	●	●	●	
13	45,6	●	●	●	●	●	●	●	●	●	●	
14	48,6	●	●	●	●	●	●	●	●	●	●	
15	51,6	●	●	●	●	●	●	●	●	●	●	

固定式 Stationary type		
No.	HH (m)	T23,18
1	5,0	●
2	11,0	●
3	17,0	●
4	23,0	●
5	29,0	●
6	35,0	●
7	41,0	●
8	47,0	●
9	53,0	●
10	59,0	●

压重式或行走式 Travelling type		
No.	HH (m)	T23,18
1	7,8	●
2	13,8	●
3	19,8	●
4	25,8	●
5	31,8	●
6	37,8	●
7	43,8	●
8	49,8	●
9	55,8	●